

# ***Quick Connectors***

Innovative, secure and quick fit  
plug-in connectors



Every day we strive to provide our customers with value through innovative cost-effective solutions to help them achieve their challenges.

NORMA Group's Quick Connector range offers state-of-the-art connection, **reducing permeation rates** and helping **reduce total system weight**. Made from synthetic material, our connectors are suitable for most media-carrying lines.




## Customer Value through Innovation

NORMA Group's innovative Engineered Joining Technologies and applications know-how make cleaner, more efficient use of precious energy sources in areas such as Cooling System, Air Intake & Induction, Emission Control, Ancillary System and Infrastructure. Distribution of NORMA Group trademark products is undertaken via a network of carefully selected companies specializing in volume distribution in their national market segments to reach the industrial aftermarket segment.

Global needs for greater energy efficiency in key sectors like transport and industrial infrastructure offer excellent growth prospects across the group's broad portfolio of Engineered Joining Technology. Maintained investments in innovative solutions fund the continued development of new products and technologies.

We will continue to strengthen the close strategic cooperation that has helped clients use our Engineered Joining Technology solutions make a major impact on their businesses. At the same time as we develop forward-thinking partnerships for our mutual benefit.

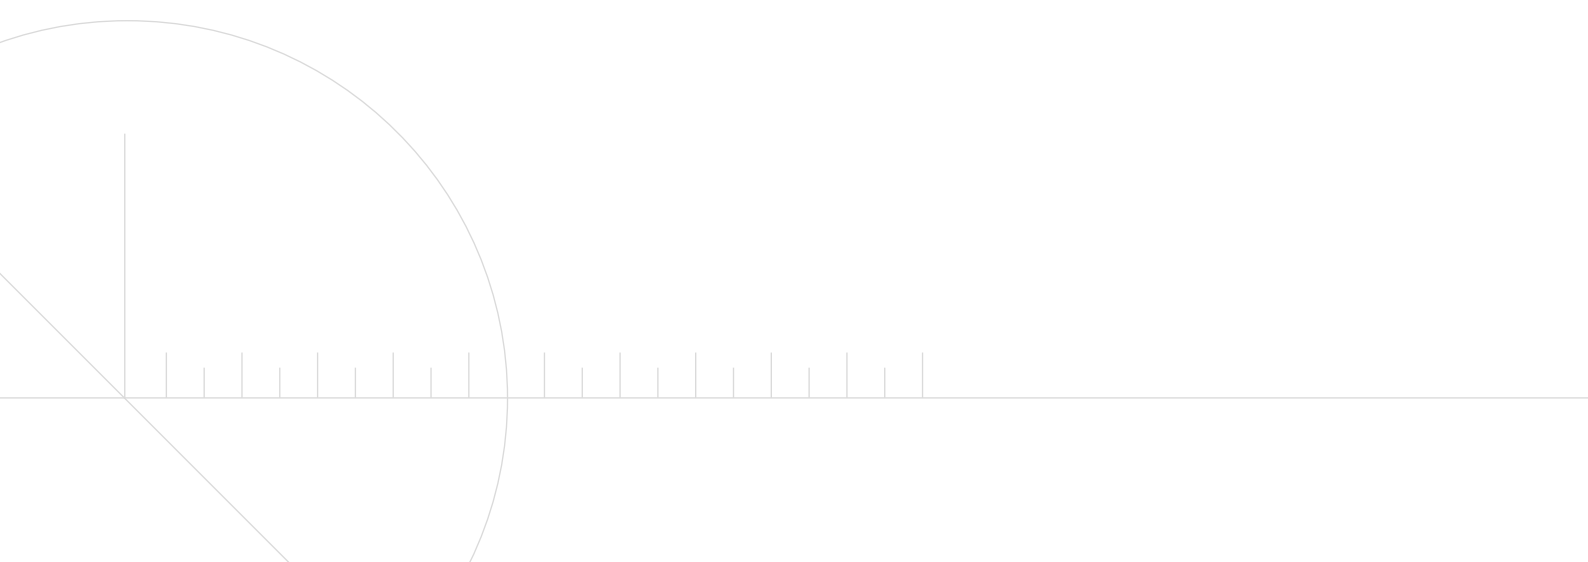

# Quick Connector Range

## VDA Quick Connectors

**PS3** "Push & Seal" plastic quick connectors are an ideal means for the secure connection of cooling water and heating hoses as well as charged air systems.



6

**C Style** Specialized plastic quick connectors developed for coolant applications.



10

## SAE Quick Connectors

**Single-Lock** Quick Connector designed for quick and safe assemblies for liquid and vapor fuel, cooling, SCR applications blow-by and braking assistance applications.



12

**Safe-Lock** Poka-Yoke Quick Connector which offers quick and safe connection through visual confirmation and double locking. Complies with liquid and vapor fuel, cooling, SCR, blow-by and braking assistance applications.



14

**Cartridge** The perfect quick connector to fit multiways plastic components, filters, temperature and pressure sensors.



16

**Ø24 mm** NORMA Group introduces Ø24 mm for Urea filling applications.



17

**S** plastic connectors are designed to connect media-carrying lines on automobiles and have been developed for fuel systems and Urea applications. The connectors can be used for both line-to-line and line-to-device connections.



**SAE Style** Specialized plastic quick connectors developed for coolant applications.



## Quick Connectors

**V2** plastic quick connectors are an ideal means to connect media-carrying lines as well as ventilation and exhaust lines in combustion engines. The connectors can be used for both line-to-line and line-to-device connections.



24

**V2-XC** The V2-XC can be used in systems for air intake and crankcase ventilation.



28

**V3** The V3 is designed for coolant vent line. To ensure that you save space, the V3 only has a half locking ring and is designed with an anti-rotation feature.



30

**MK** MK Connectors have been developed to reduce permeation rates. Compared with standard connectors that are prone to high permeation rates and constant micro leakage, MK provides the perfect link between the tank and the pipe system.



33

**TWIST II** The TWIST II was brought to the market to connect plastic air intake or cooling system pipes in order to get leak-proof connections.



35

**TWIST III** TWIST III is a quick connector series for charged air system applications.



37




# **VDA Quick Connectors**

NORMA Group PS3 Connectors offer an optimized design that reduces weight and leads to lower fuel consumption.

## VDA QUICK CONNECTORS

### PS3 – QUICK CONNECTORS

PS3 “Push & Seal” plastic quick connectors are an ideal means for the secure connection of coolant and heater hoses as well as charged air systems.

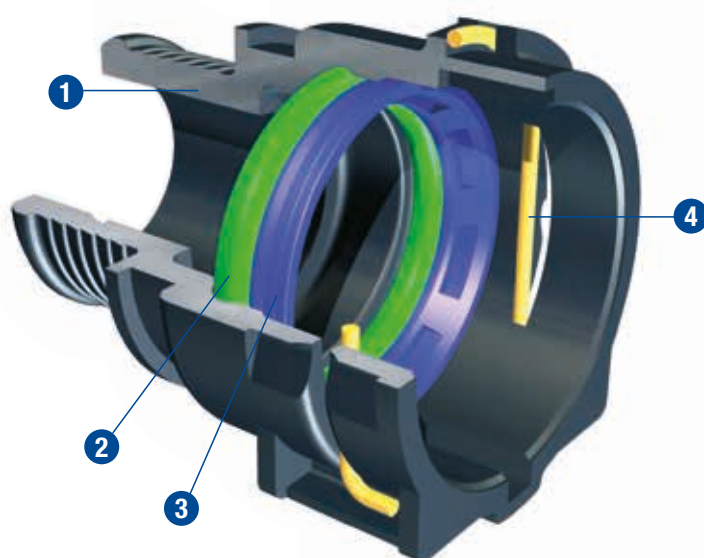

### *The advantages at a glance*

- Time and cost reduction
- Automated processes
- To be used in extremely narrow spaces
- Optimal tightness
- Locator/anti rotation tab feature

- ❶ Housing
- ❷ O-ring
- ❸ Retaining ring
- ❹ Retainer (spring)



### Applications

- Cooling water lines
- Heating lines
- Charged air connections


## PS3

### VDA-Connecting spigot

Please note that all PS3 connectors are delivered without spigot.

We will be pleased to offer suitable spigots for line to line connection on request.

- 1 Housing**
- 2 O-ring**
- 3 Retaining ring**
- 4 Retainer (spring)**
- 5 Connection spigot**
- 6 Diameter of bore = Nominal Width (NW)**

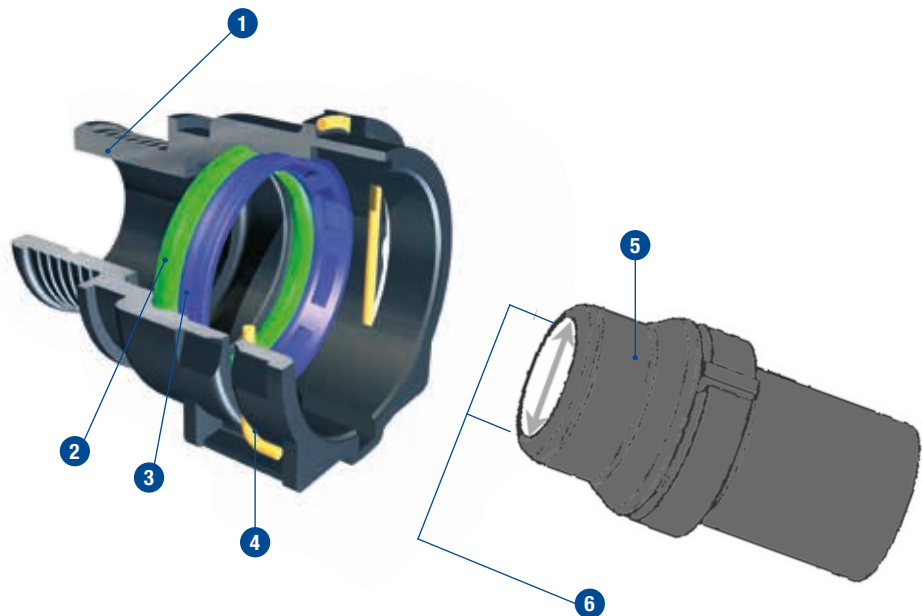

### Standard materials

PS3 quick connectors are made from recyclable materials. For our standard versions we use Polyamide 6.6 with 30% glass fiber content.

This material is compounded for heat and hydrolysis requirements. The parts are designed for use in direct contact with coolant.

The standard material for the O-rings consists of peroxide-cured EPDM which is resistant to coolant.

In case of special applications (e.g. charged air ducts) PS3 connectors can be made from other technical thermoplastic materials with different filler types and contents. Also O-rings made of FPM or other compounds are possible. Please note, however that special types can only be made when the required minimum quantity is ordered.

## VDA QUICK CONNECTORS

### PS3


#### Typical technical features

Medium/Fluid	Operating Pressure	Operating Temperature
Coolant	Approximately 0-2 bar excess pressure, partially pulsating (sinusoidal).	Engine compartment: –40°C to +135°C Short time up to +150°C (approx. 30 min.)

Test parameters are significantly higher than operation parameters. Tests can be done for each application separately.

#### Summary of sizes

Two types of PS3 (0° and 90°) are available as standard versions.

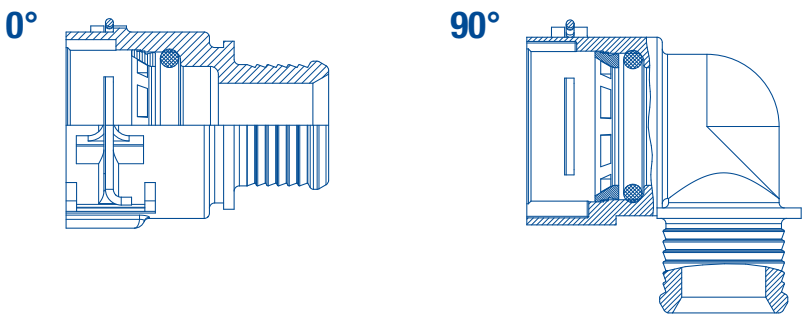

Nominal diameters in mm (inside diameter of the bore)	0°	90°
8	X	X
12	X	X
16	X	X
20	X	X
26	X	X
32	X	X
50	X	—

## PS3


### Enquiries/ordering

When making enquiries or placing orders please state as follows:

	1. Type	2. Nominal width	3. Variant
Example	PS3	16	0°

During the last couple of years we have built up a selection of approx. 200 special/customized connector types. The geometries can be substantially modified to customer requirements and it is possible to integrate additional functional elements, e. g. thermo sensors. We would be pleased to answer your questions.


### Examples for special/customized connector types

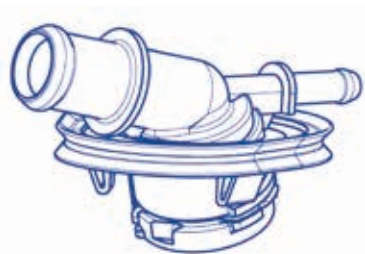

PS3 with integrated junction piece, seal and branch



Flow-optimized PS3 with integrated receptacle for thermo sensor

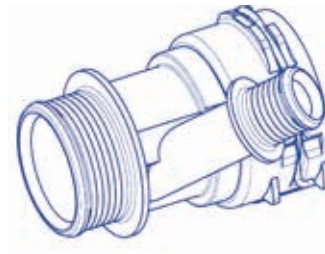

PS3 with integrated junction piece

## VDA QUICK CONNECTORS

### C STYLE

Specialized plastic quick connectors developed for coolant applications. Test parameters are significantly higher than operation parameters. Special applications possible, contact us!



### *The advantages at a glance*

Media: Coolant

- Operating temperature:  $-40^{\circ}\text{C}$  to  $135^{\circ}\text{C}$ , short term higher
- Pressures: 0 to 2 bar pos. pressure, partially pulsating (sinusoidal)
- Vibrations: Usually engine vibrations 7–200 Hz, 0.2–20 g

- 1 Connector
- 2 O-ring
- 3 Retaining ring
- 4 Retainer (spring)
- 5 Housing
- 6 Diameter of bore = Nominal Width (NW)

#### Applications

- Coolant, glycol and water applications




# SAE Quick Connectors

NORMA Group delivers the right SAE connectors for fluid systems, helping reduce permeation rates and assembly times as well as providing optimal temperature and chemical resistance.

## SAE QUICK CONNECTORS

### SINGLE-LOCK QUICK CONNECTOR

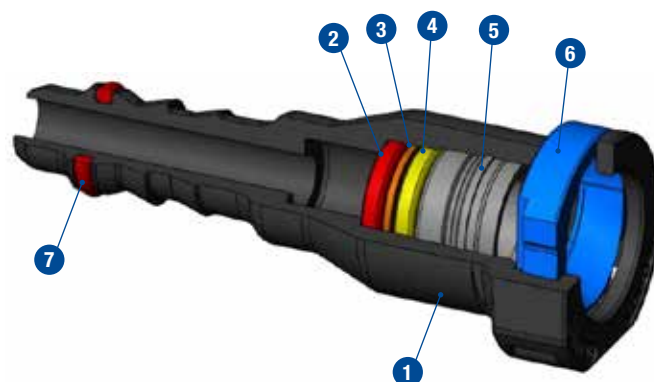

### *The advantages at a glance*

- Easy to connect
- Temperature resistance from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  ( $150^{\circ}\text{C}$  peak)
- Compact design
- Validated by major OEMs

- 1 Housing
- 2 Primary O-ring
- 3 Spacer
- 4 Secondary O-ring
- 5 Sleeve
- 6 Single-lock retainer
- 7 Firtree O-ring (optional)

### Applications

- Fuel lines (feed and return)
- Vapor and venting lines
- Vacuum brake lines
- SCR lines
- Blow-by

## SINGLE-LOCK




### Summary of sizes

	180°	90°	45°
6,35 mm	X	X	—
7,89 mm (5/16" SAE)	X	X	X
8 mm (metric)	X	X	—
9,49 mm (3/8" SAE)	X	X	X
9,89 mm (10mm SAE)	X	X	X
10 mm (metric)	X	X	—
11,8 mm (12 mm SAE)	X	X	X
12,7 mm (1/2")	X	X	X
13 mm	X	X	—
15,82 mm (5/8" SAE)	X	X	X
17,5 mm	X	X	—
22 mm	X	—	—

## SAE QUICK CONNECTORS

### SAFE-LOCK QUICK CONNECTOR

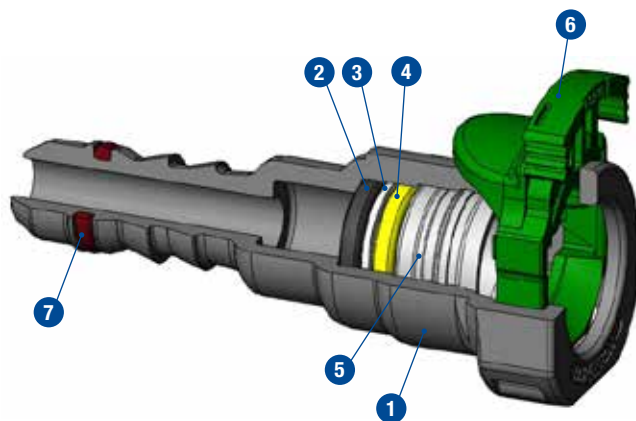

### *The advantages at a glance*

- Easy to connect
- Double-latch mechanism
- Poka-Yoke function to verify good connection
- Temperature resistance from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  ( $150^{\circ}\text{C}$  peak)
- Compact design
- Disconnection without tooling

- ① Housing
- ② Primary O-ring
- ③ Spacer
- ④ Secondary O-ring
- ⑤ Sleeve
- ⑥ Safe-lock retainer
- ⑦ Firtree O-ring (optional)

### Applications

- Fuel lines (feed and return)
- Vapor and venting lines

## SAFE-LOCK




### Summary of sizes

	180°	90°	45°
7,89 mm (5/16" SAE)	X	X	X
9,49 mm (3/8 " SAE)	X	X	X
11,8 mm (12 mm SAE)	X	X	X
12,7 mm (1/2")	X	X	X
15,82 mm (5/8" SAE)	X	X	X

SAE QUICK CONNECTORS

CARTRIDGE

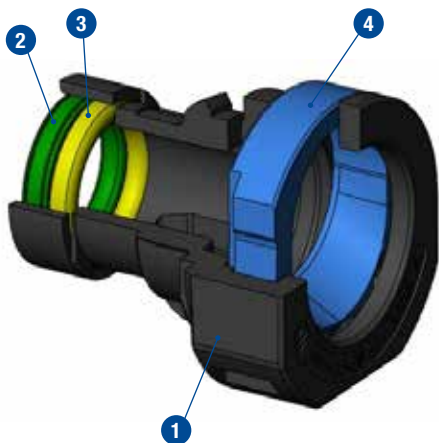

The advantages at a glance

- Direct quick connection between the stem and an equipment
- Simple assembly process
- Manual disconnection of the stem
- Compact solution

A good solution to have a multi-ways quick connector



- 1 Housing
- 2 Primary Z14 seal
- 3 Secondary O-ring
- 4 Retainer (spring)

Applications


- Fuel lines (feed and return)
- Vapor and venting lines



Summary of sizes

	Single-Lock	Safe-Lock
7,89 mm (5/16" SAE)	X	In dev.
8 mm (metric )	X	—
9,89 mm (10 mm SAE)	X	—
10 mm (metric)	X	In dev.

## Ø24 MM

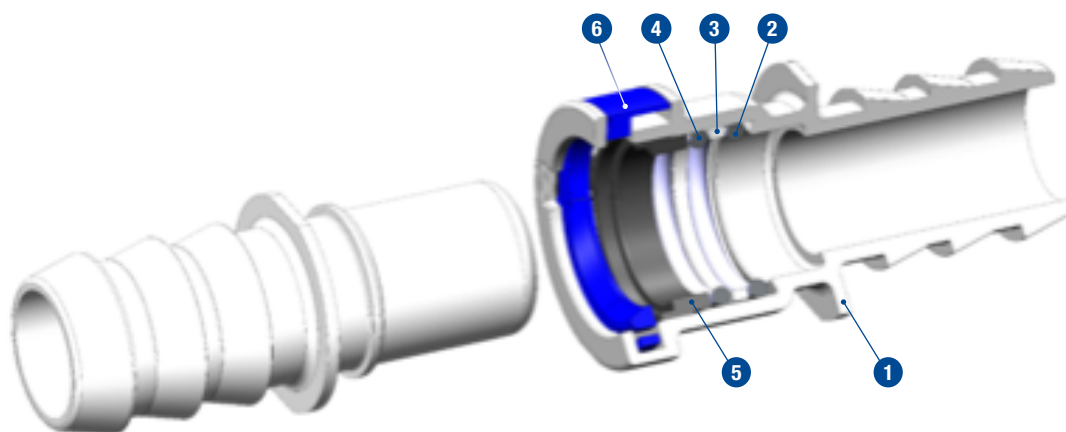

### *The advantages at a glance*

- Low insertion force
- Compact design



- 1 Housing
- 2 Primary O-ring
- 3 Spacer
- 4 Secondary O-ring
- 5 Sleeve
- 6 Single-lock retainer


### Applications

- Urea filling tank

## SAE QUICK CONNECTORS

### S – SAE J2044 QUICK CONNECTORS

S plastic quick connectors are designed to connect media-carrying lines on automobiles and have been developed for fuel system applications. The product is characterized by its “click” sound as well as its quick and safe connection.

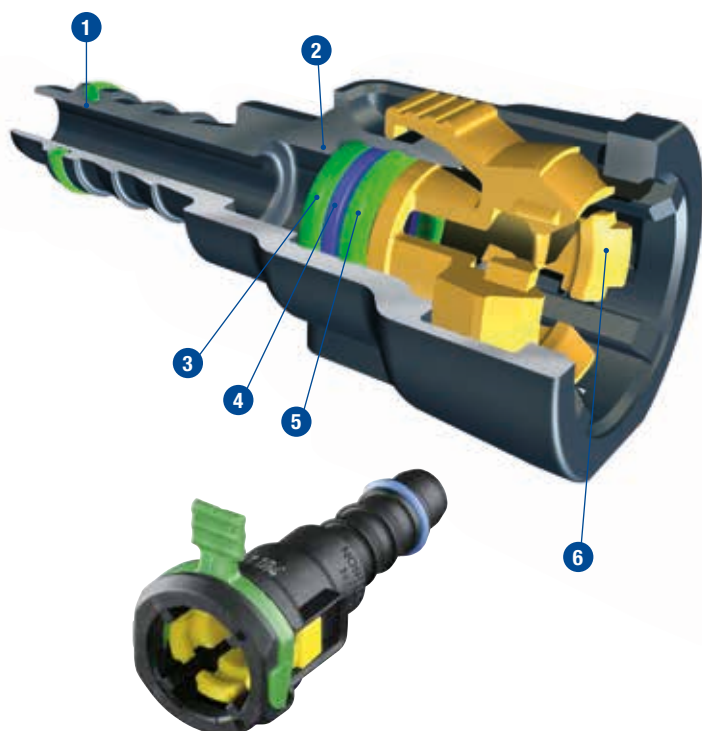

### *The advantages at a glance*

- Fast assembly without tool
- Robot assembly possible
- Compact building method
- Integrated seal
- Closing cone principle
- High pull off resistance

- 1** Firtree plus O-ring (optional)
- 2** Housing
- 3** Primary O-ring
- 4** Spacer
- 5** Secondary O-ring
- 6** Retainer (spring)


### Applications

- Fuel lines
  - Feed and return lines
  - Tank breathing
- Ventilation lines
- Oil cooler lines
- Vacuum control lines
- Urea (SCR)

## S

### Connecting spigot

To NORMA Group's standard (Production drawings will be made available on request) S connectors can be used on both plastic and metal spigots. Please note that all S connectors are delivered without spigot. However, we will be pleased to offer suitable spigots on request.

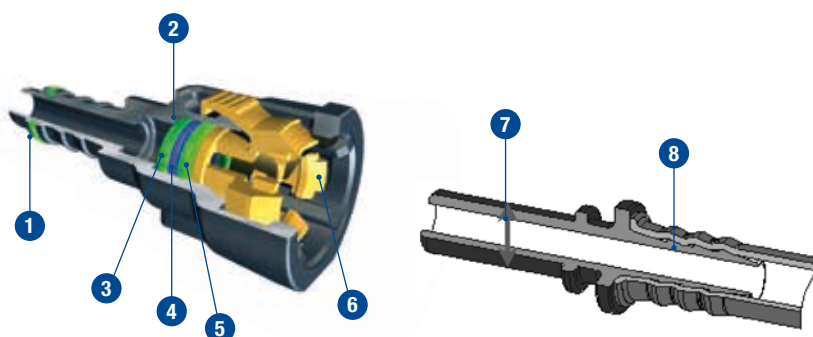

- 1 Firtree plus O-ring (optional)
- 2 Housing
- 3 Primary O-ring
- 4 Spacer
- 5 Secondary O-ring
- 6 Retainer (spring)
- 7 Diameter of Connecting spigot = Nominal Width (NW)
- 8 Adapter

S connectors are made from recyclable materials featuring extremely low permeation values. Our standard versions are made from Polyamide 6 or Polyamide 12 with 20–50% glass fiber content. The O-rings are made of FPM and FVMQ as standard equipment.

### Insiders' Tip

The perfectly matched system is achieved when combining S quick connectors and our fluid systems.

### Technical features

Medium/Fluid	Operating Pressure	Operating Temperature
Fuel	Approx. 10 bar excess pressure	Engine compartment: –40°C up to +135°C Short time up to +150°C (approx. 30 min.)


Meeting the requirements of SAE J2044

SAE QUICK CONNECTORS

S

Summary of sizes

Types of S (0° and 90°) are available as standard versions (special versions like 45° or others upon request).

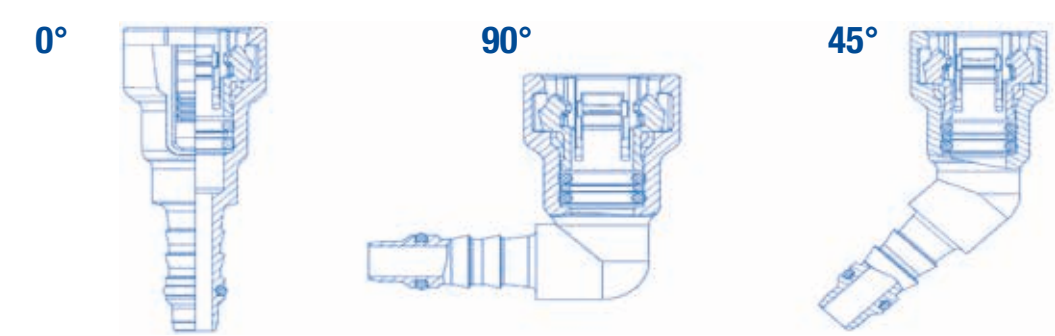

Nominal size	Outside diameter spigot (o-ring sealing diameter of spigot)	Version 0°	Version 90°	Version 45°
1/4"	6.3 mm	X	X	–
5/16"	7.89 mm	X	X	X
8 mm	8.00 mm	X	X	–
3/8"	9.49 mm	X	X	X
10 mm	9.89 mm	X	X	X
1/2"	12.61 mm	X	X	X
14 mm	14.24 mm	X	X	X
5/8"	15.82 mm	X	X	X

Materials

S connectors are made from recyclable materials featuring extremely low permeation values. Our standard versions are made from Polyamide 6 or Polyamide 12 with 20–50% glass fiber content. The o-rings are made of >FPM< and >FVMQ< as standard equipment. All our available nominal sizes are validated according SAEJ2044.

Enquiries/ordering

When making enquiries or placing orders please state as follows:

		Example
1.	Quickconnector Type	NQS
2.	"Nominal size (o-ring sealing diameter of spigot)"	"5/16" "(7.89 mm)"
3.	Version 0°, 45° or 90°	0°
4.	Application	Fuel
5.	"Inner diameter assembled PA-tube or hose"	PA-tube ID=06 mm
6.	OEM / end customer	tbd
7.	Annual volume	100,000 pieces / year
8.	SOP	CW 34/2014

## SAE STYLE

Specialized plastic quick connectors developed for coolant applications.  
Test parameters are significantly higher than operation parameters.  
Special applications possible, contact us!



## *The advantages at a glance*

- Media: Coolant
- Operating temperature:  $-40^{\circ}\text{C}$  to  $135^{\circ}\text{C}$ , short term higher
- Pressures: 0 to 2 bar pos. pressure, partially pulsating (sinusoidal)
- Vibrations: Usually engine vibrations 7–200 Hz, 0.2–20 g

- 1 Firtree or hose barb option
- 2 Housing
- 3 Primary O-ring
- 4 Spacer
- 5 Secondary O-ring
- 6 Retainer (spring)

### Applications

- Coolant, glycol and water applications



# Quick Connectors





The quick connector range of plug-in connectors from NORMA Group is suitable for most media-carrying lines. NORMA Group quick connectors offer state-of-the-art connection, whatever the connection – heavy duty or more general.

## QUICK CONNECTORS

### V2 – QUICK CONNECTORS

V2 plastic quick connectors are an ideal means to connect media-carrying lines as well as ventilation and exhaust lines in the automotive industry.



### *The advantages at a glance*

- Fast assembly without tool
- Robot assembly possible
- Compact dimensions
- Integrated seal
- The seals can be visually checked

- 1 Firtree plus O-ring (optional)**
- 2 Housing**
- 3 Primary O-ring**
- 4 Secondary O-ring**
- 5 Locking device (ring)**

#### Applications

- Fuel tank ventilation
- Ventilation and exhaust lines
  - Secondary air lines
  - Crank case ventilation lines
- Oil cooler lines
- Vacuum brake line

## V2

### Connecting Spigot

To NORMA Group's standard (Production drawings will be made available on request)  
V2 connectors can be used on both plastic and metal spigots. Please note that all V2 connectors are delivered without spigot. However, we will be pleased to offer suitable spigots on request.

**1 Firtree plus O-ring (optional)**

**2 Housing**


**3 Primary O-ring**

**4 Secondary O-ring**

**5 Locking device (ring)**

**6 Spigot**

**7 Pipe inside diameter  
= Nominal Width (NW)**

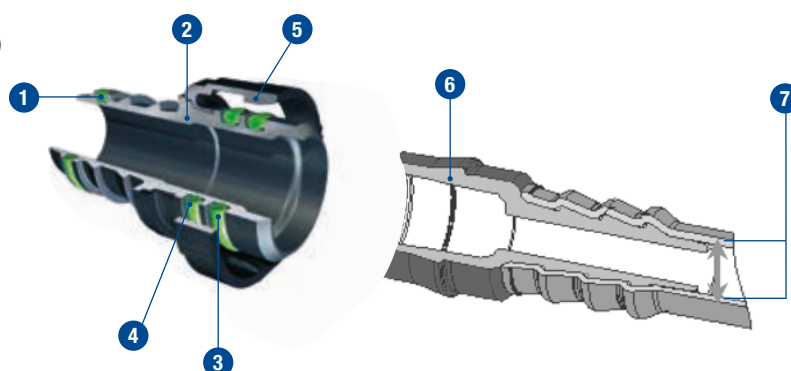

### Standard materials

V2 connectors are made from recyclable materials featuring extremely low permeation values. Our standard versions are made from Polyamide 6 with 30% glass fiber content or Polyamide 12 with 20% glass fiber content. The O-rings are made of NBR, HNBR, FPM and FVMQ as standard equipment.

### Insiders' Tip

The perfectly matched system is achieved when combining V2 quick connectors and our fluid systems.



### Technical features


Medium/Fluid	Operating Pressure	Operating Temperature
Air, oil & fuel vapors	Approx. 2,5 bar excess pressure	Engine compartment: -40°C up to +135°C Short time up to +150°C (approx. 30 min.)

# QUICK CONNECTORS

## V2

### Summary of sizes


Two types of V2 connectors (0° and 90°) are available as standard versions.

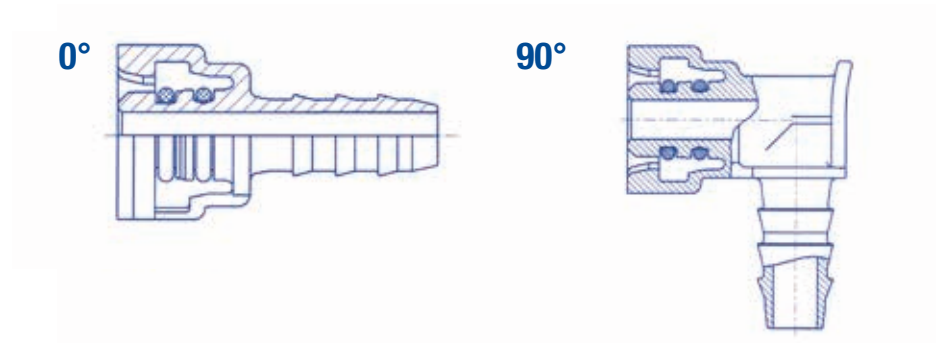

Nominal width (mm) (inside diameter of the PA pipe to be connected)	0°	90°
4	X	X
6	X	X
7	X	X
8	X	X
10	X	X
12	X	X
15	X	X
19	X	X
25	X	—
27	X	X
33	X	—

### Examples


The drawings show the principle as exemplified by the V2 NW 19, 90° quick connector:

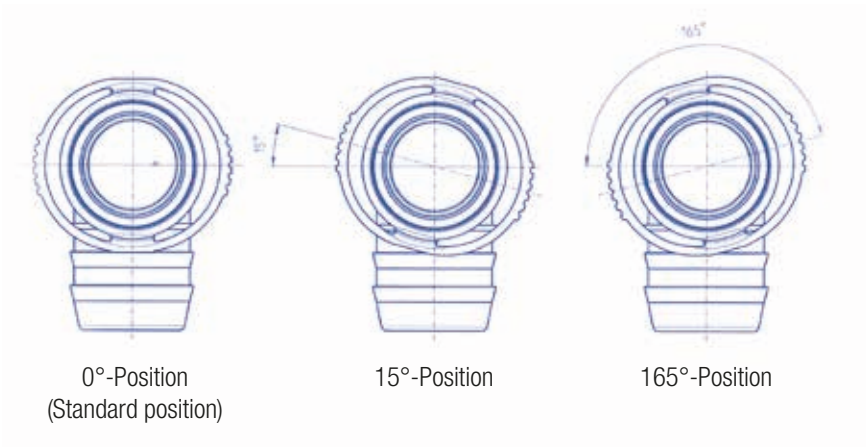

## V2

### Examples

During the last couple of years we have built up a selection of approx. 200 special/customized connector types. We will be pleased to inform you in more detail on request.

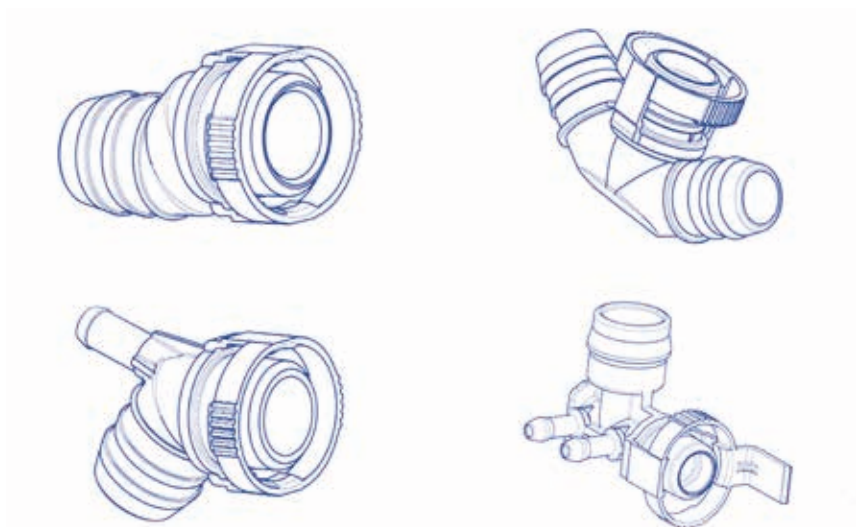

### Enquiries/ordering

When making enquiries or placing orders please state as follows:

	1. Type	2. Nominal width	3. Variant
Example	V2	15	0°

Special installation dimensions may require the locking ring to be oriented at an angle which deviates from that of the standard version. For such cases we supply quick connectors with locking rings oriented at the following angles:

V2-NW 19 with locking ring oriented at an angle of 15°, 30°, 45° etc. in steps of 15°

V2-NW 27 with locking ring oriented at an angle of 10°, 20°, 30° etc. in steps of 10°

## QUICK CONNECTORS

### V2-XC – QUICK CONNECTORS

NORMA Group introduces the new V2-XC Quick Connector developed to deal with increasing demands in heavy duty applications (e.g. commercial vehicles, passenger vehicles, agricultural equipment and off-road equipment) and extended lifetime requirements. The more robust locking/unlocking concept makes it a pioneering innovation on the market.

Tighter emission controls call for reduced fuel consumption and improved efficiency. Despite these tough challenges, heavy-duty vehicles are still expected to deliver excellent performance. This means heavier engine loads, which in turn mean increased temperatures and pressures in media-carrying lines. The new V2-XC Quick Connector was made to meet these extreme conditions.



## *The advantages at a glance*

- Fast assembly without tools
- Long lifetime due to robust design
- Resistance to high temperatures
- Compact dimensions
- Integrated seal
- Seals can be visually checked

- 1 Housing
- 2 Sealing Ring
- 3 Locking Ring
- 4 Locking Bail

### Applications

- Commercial vehicles, passenger vehicles, agricultural equipment, off-road equipment.


### Connecting spigot

The V2-XC Quick Connector is made to fit all existing V2 standard spigots. V2-XC connectors can be used on both plastic and metal spigots. All connectors are delivered without spigot, but we are pleased to offer suitable spigots on request.



Original V2 Quick Connector

## V2-XC

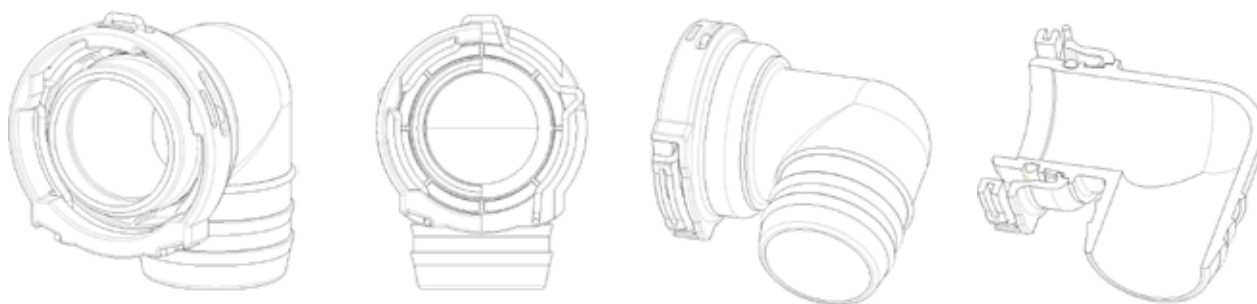

### Technical features

The diameter 27 mm<sup>1</sup> is validated and available in the following configurations:

Barb angle	Retainer angle	Temperature	Pressure
(0°) <sup>2</sup>	Available in 10° increments between 0° and 350°	Standard version –40°C to + 150°C <sup>3,4</sup>	–0.5 ... 5 bar (rel.) <sup>4</sup>
15°			
45°			
80°			
90°			

<sup>1</sup> Other diameters available on request

<sup>2</sup> Available on request

<sup>3</sup> Temperature range depends on sealing material versions

<sup>4</sup> Higher requirements (temperature, pressure, ...) available on request

### Standard materials

V2-XC Quick Connectors are made from recyclable materials featuring extremely low permeation values. Our standard versions are made from Polyamide 6 with 30% glass fiber content or Polyamide 12 with 20% glass fiber content. The O-rings are made of NBR, HNBR, FPM, EPDM as standard equipment.

### Additional material information

PA6-GF30 (Housing)

PA66-GF30 (Housing)

PA12-GF20 (Housing)

PA666-GF30 (Locking Ring)

## QUICK CONNECTORS

### V3

The V3 is designed for coolant vent lines. To guarantee that the product can resist cooling water, the V3 is made two-parted. The housing is made of materials resistant to cooling water and the locking ring is made of flexible material.



### *The advantages at a glance*

- Simple design
- Cost effective and reliable
- No assembly or disassembly tool required
- Anti-rotation feature

- 1 Housing
- 2 Plastic or metal locking-ring/retainer
- 3 O-ring (hidden in image)
- 4 V3 with integrated check-valve



### Applications

- Coolant vent lines

## V3

### Connecting spigot

To NORMA Group's standard (production drawings will be made available on request)  
V3 connectors can be used on both plastic and metal spigots. Please note that all V3 connectors are delivered without spigot. However, we will be pleased to offer suitable spigots on request.



Available double-spigots.  
V3 size 6-9,4-0° for rubber-hose and PA tubes.

### Technical features

Medium/Fluid	Operating Pressure	Operating Temperature
Coolant	Approximately 0-2 bar excess pressure. Can be tested for each application separately.	Engine compartment: –40°C to +135°C Short time up to +150°C (approx. 30 min.)

### Standard materials

<b>Housing</b>	PA66-GF35
<b>Locking-ring</b>	PA6-GF50
<b>O-Ring</b>	EPDM
<b>Retainer/Locking-ring</b>	stainless steel

# QUICK CONNECTORS

## V3

### Examples



V3 NW6-6-90°-270°-ARF270° (2-Part Plastic Clip Version, Assembly with PA Tube)



V3 NW6-6-T-ARF0° (2-Part Plastic Clip Version)



V3 NW6-0°-ARF0°-Plug (2-Part Plastic Clip Version)



V3 NW6-0°-ARF0°-Plug (2-Part Plastic Clip Version)



V3 NW6-6-0° Double Spigot (Prototype)



V3 NW6-6-90°-270°-ARF270° (2-Part Plastic Clip Version)



V3 NW6-6-0°-0°-ARF0° (2-Part Plastic Clip Version)



V3 NW6-6-2CH-ARF270° (Metal Locking Bail, 2-Channel, Customers Property)



V3 NW6-6-0°-0°-ARF270°-RSV (Metal Locking Bail, Flow Valve “RSV”)



V3 NW6-6-90°-0°-ARF0°-RSV (Metal Locking Bail)



V3 NW6 Connections on Cooling water degasing Tank



V3 NW6 Connection on thermo controlled throttle housing

## MK

MK connectors have primarily been developed to reduce permeation rates. Compared with standard connectors that are prone to high permeation rates and constant micro leakage, MK provides the perfect link between the tank and the pipe system. The MK is not a standard part. All projects are based on specific customer requirements. We are therefore pleased to receive a description of your application in order to offer you an optimal, customized solution.



## *The advantages at a glance*

- Competitive price
- Can offer the complete solution and knowledge
- Full in-house production – we produce the entire system on our own from connectors to fuel lines to multi-layer lines
- Easy assembly
- Low permeation rate
- LET tube key component meets high requirement for a competitive price
- Reduces weight
- State-of-the-art lab to test products on request
- Conductive PA is possible

**Easily combined with other NORMA Group's products such as:**

- S
- PS3
- V2
- Fluid Systems

## Technical features


- Angle versions: 0°, 90°
- Meeting the requirements of standards as ENG 016, VW TL 82417, KT-2KDL-0802, STD-SAL 0013

## QUICK CONNECTORS

### MK


#### Connecting spigot

MK connectors have been developed with the aim to achieve significantly reduced permeation rates. They provide a perfect link between the tank and the pipe system in cases where existing standard 1K connectors are prone to a high permeation rate while their tendency to “creep” causes additional micro leakage. MK connectors for the first time combine reinforced and unreinforced materials and thus enable the safe connection of the connector with the plastic fuel tank.

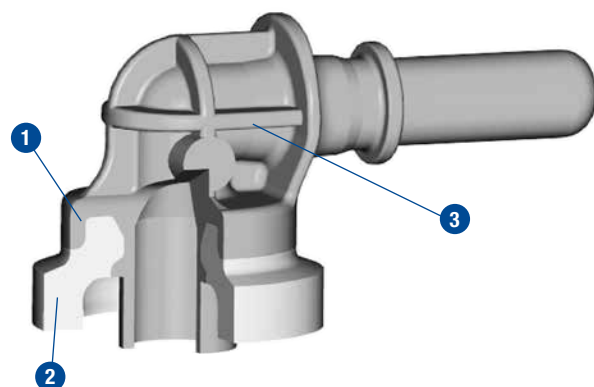

- 1 Chemical bonding
- 2 Welded ring HDPE
- 3 Spigot PA 12 (glass fiber reinforced)

#### MK with S

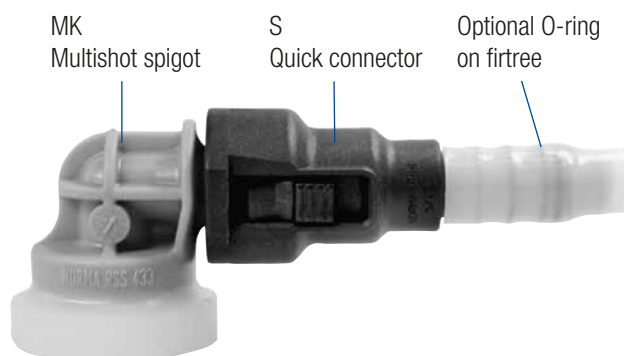

#### Standard materials

MK combine materials that so far have been incompatible. Welded ring made from HDPE, can be welded onto the plastic fuel tank. Spigot made from Polyamide 12 with 30% glass fiber content.

#### Insiders' Tip

The perfectly matched system is achieved when combining MK connecting spigots and NORMA Group Fluid systems.

## TWIST II – QUICK CONNECTORS

The TWIST II was brought to the market to connect plastic air intake or cooling system pipes in order to get leak-proof connections. By using the TWIST connector system, you can combine your design with plastic, aluminum or steel tubes. Flexibility and freedom of design are key words when systems with integrated TWIST connectors are engineered. TWIST connectors are engineered, eliminating leakages and helping reduce weight.



### *The advantages at a glance*

- Can be integrated in end-tanks as well as be mounted on tubes or hoses
- A secure seal to the mating spigot with a low assembly force
- Robust and clear locking features with a click function to ensure a correct lock
- Easy operation for disassembly
- Temperature resistance of up to 180°

**1 Housing**

**2 Ring**

**3 Sealing Component**

### Applications

- Air intake, charge air and cooling water systems

## QUICK CONNECTORS

### TWIST II

#### Variants

Since all our TWIST II are made of thermoplastic materials, we can adopt the connector features and customize our connectors to suit your demands.



TWIST II – 0°



TWIST II – 90°



TWIST II elbow – 90°



TWIST II – 0°

#### Materials


The components are combined in a way to match the specific requirements of each application and to provide the best possible physical and chemical properties. TWIST II is manufactured in recyclable materials with low permeation values. PA 66 with a glass fibre content of 30% is usually used for standard products. For coolant applications, we recommend the use of heat and hydrolysis stabilized glass fibre reinforced PA materials. Special applications, e.g. charge air systems with high temperatures require specific material grades. On request, we are ready to advise you on the best-suited material choice. O-rings are made of standard materials EPDM, NBR, FPM and FVMQ.

#### Standard materials

TWIST II quick connectors are made out of recyclable materials. As a standard solution Polyamide 6.6 with 30% to 50% glass fiber reinforcement is used. When an application requires, other engineering thermoplastic material can be used. Different reinforcement fillers and additional heat or hydrolysis resistance can also be added. Application-based design is possible when a minimum required quantity is ordered.

## TWIST III – QUICK CONNECTORS

TWIST III is a quick connector series for charged air system applications. Developed to meet extremely tough requirements, especially in low-emission vehicles, it combines a low assembly effort with very good hydrolysis tolerance, temperature resistance and mechanical performance. TWIST III operates at approx. 3.5 bar excess pressure and engine compartment temperatures of  $-48^{\circ}\text{C}$  up to  $+135^{\circ}\text{C}$ . Standard design configurations,  $90^{\circ}$  and adaptors. Special designs are also available.

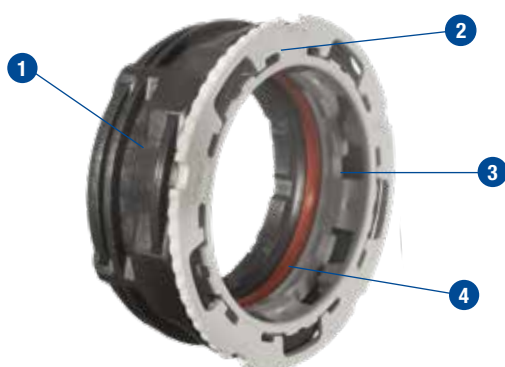

Standard design



Optional design

Optional design



Optional design – Customer specific with an air port and a sensor base.

### *The advantages at a glance*

- Compact design – space savings
- Always in “closed” position
- Easy open – no tool needed

- 1 Housing**
- 2 Spider Ring**
- 3 Supporting Ring**
- 4 Sealing component**

### Applications

- Charge air applications – cold side

## QUICK CONNECTORS

### TWIST III

#### Examples



**TWIST III V0 SP**, welded on a blow molded pipe

#### Standard sizes and designs

TWIST III connector size designations are determined by the sealing diameter (ØD1) of the TWIST III spigot. Current standard diameters are listed below. Larger diameters may be added. Five standard sizes are available. TWIST III SP (spin-weld) is for applications where the quick connector will be spin-welded to other injection or blow-molded plastic components. TWIST III is also available for hot plate welding (HP). Based on recommendations from a spin-welding equipment supplier, this design includes weld surfaces, flash traps and support surfaces. This connector is tested using the GMW 15803 specification as reference.

TWIST III Quick Connector	Ø D1 (mm)
<b>TWIST III</b> 48.40	48.40
<b>TWIST III</b> 56.40	56.40
<b>TWIST III</b> 67.40	67.40
<b>TWIST III</b> 71.40	71.40
<b>TWIST III</b> 80.00	80.00

## TWIST III

---

### Optional designs

TWIST III connector size designations are determined by the sealing diameter ( $\varnothing D1$ ) of the TWIST III spigot. Current standard diameters are listed below. Larger diameters may be added. Five standard sizes are available. TWIST III SP (spin-weld) is for applications where the quick connector will be spin-welded to other injection or blow-molded plastic components. TWIST III is also available for hot plate welding (HP). Based on recommendations from a spin-welding equipment supplier, this design includes weld surfaces, flash traps and support surfaces. This connector is tested using the GMW 15803 specification as reference.

### Materials and construction

Standard versions are made from recyclable polyamide 66 with 35% to 50% GF. O-rings are currently available in Silicone (for diesel fuel resistance) and AEM (for gasoline resistance). For housing, we have also PBT with 30% to 45% material. Note that both plastic and metal spigots can be used. TWIST III quick connectors have a 360° symmetrical design. As they can be opened from any angle, they are perfect for tight environments as well as spin-weld applications. Additional cut-outs or knobs are not necessary.

This catalogue supersedes all previous issues. All rights reserved in all countries. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this catalogue (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this catalogue do not replace accepted good practice or the safety-related legal and regulatory provisions. References to standards in force at 20/08/2018 are not contractually binding.

ABA, BREEZE, NORMA and TORRO are registered trademarks of the NORMA Group.

## **NORMA Group**

Postfach 1149 · D-63461 Maintal  
Edisonstraße 4 · D-63477 Maintal  
Germany

Tel.: +49 (6181) 4 03-0

Fax.: +49 (6181) 4 03-210

[www.normagroup.com](http://www.normagroup.com)

[info@normagroup.com](mailto:info@normagroup.com)