


# NORMACLAMP® Quick lock



## Quick and easy installation

- ✓ Safe joint with the hose
- ✓ Flexibility
- ✓ Clamping range from 25 – 40 up to 60 – 1300 mm
- ✓ Smooth edges prevent damage to the pipe

**NORMACLAMP® Quick lock**

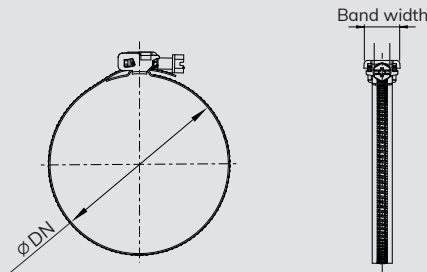

**Applications**

Quick lock is well suited to applications involving poly and braided tubing that require a complete seal, e.g. for:

- Water industry
- Air conditioning
- Sanitary
- Construction

**Materials**

<b>Group</b>	W2B and W4
<b>Band</b>	W2B (SS – AISI 430) and W4 (SS – AISI 304)
<b>Housing</b>	W2B (Galvanized steel) and W4 (SS – AISI 304)

Band width (mm)	Description	Clamping range Ø DN (mm)	Part number		Packaging quantity (pcs)
			W2B	W4	
9	Quick lock 25-40	25 – 40	0815 6120 040	–	100
9	Quick lock 25-45	25 – 45	0815 6120 045	–	100
9	Quick lock 32-50	32 – 50	0815 6120 050	–	100
9	Quick lock 40-60	40 – 60	0815 6120 060	–	100
9	Quick lock 50-70	50 – 70	0815 6120 070	–	100
9	Quick lock 60-80	60 – 80	0815 6120 080	–	100
9	Quick lock 60-90	60 – 90	0815 6120 090	–	50
9	Quick lock 60-100	60 – 100	0815 6120 100	–	50
9	Quick lock 60-110	60 – 110	0815 6120 110	0815 6130 110	50
9	Quick lock 60-125	60 – 125	0815 6120 125	–	50
9	Quick lock 60-135	60 – 135	0815 6120 135	0815 6130 135	50
9	Quick lock 60-145	60 – 145	0815 6120 145	0815 6130 145	50
9	Quick lock 60-165	60 – 165	0815 6120 165	–	50
9	Quick lock 60-170	60 – 170	–	0815 6130 170	50
9	Quick lock 60-175	60 – 175	0815 6120 175	–	50
9	Quick lock 60-215	60 – 215	0815 6120 215	0815 6130 215	50
9	Quick lock 60-270	60 – 270	0815 6120 270	0815 6130 270	50
9	Quick lock 60-280	60 – 280	0815 6120 280	–	50
9	Quick lock 60-290	60 – 290	0815 6120 290	–	50
9	Quick lock 60-325	60 – 325	0815 6120 325	0815 6130 325	50
9	Quick lock 60-370	60 – 370	0815 6120 370	–	50
9	Quick lock 60-380	60 – 380	0815 6120 380	0815 6130 380	50
9	Quick lock 60-425	60 – 425	0815 6120 425	0815 6130 425	50
9	Quick lock 60-525	60 – 525	0815 6120 525	0815 6130 525	50
9	Quick lock 60-630	60 – 630	0815 6120 630	–	50
9	Quick lock 60-660	60 – 660	0815 6120 660	0815 6130 660	50
9	Quick lock 60-1050	60 – 1050	0815 6121 050	–	50
9	Quick lock 60-1300	60 – 1300	0815 6121 300	–	50


**Technical benefits**

- ✓ Screw housing for easy tightening
- ✓ 'In-line' housing, which enables every thread on the worm to engage with the band
- ✓ Perforated band
- ✓ Safety buckle, keeping the band aligned

**NORMACLAMP® Quick lock is part of a broad portfolio. Discover more!**



Hi-torque clamp

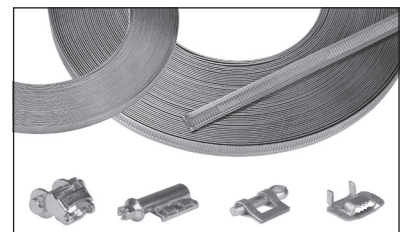

Normetta



**Do you have questions or require a personal consultation?**

Feel free to contact our NORMA Team! Tel.: +49 6181-403-0

Visit our website for more information about our products: [www.norma-connects.com](http://www.norma-connects.com)