


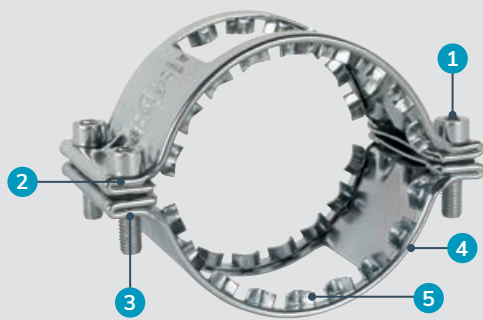

- 1 Hexagonal socket bolts
- 2 Guiding side
- 3 Threaded side
- 4 Housing
- 5 Anchoring teeth

The claw which resists high tensile loads

Our **NORMACONNECT®** DCS Combi Claw is an axial restraint safety claw for connecting rainwater and sewage lines that are at risk of undergoing back pressures. It is used in combination with **NORMACONNECT®** RAPID/RAPID MSM and standard connectors. The powerful add-on claw for non-pull-out resistant connections.

Materials

W1	W2	W3	W4	W5
x				

Information

- Axial restraint up to 10 bar
- Diameters DN 50 up to DN 300

W1

- Material, Housing: Steel, surface protected
- Material, Closure unit: Steel, surface protected

Technical data & Ordering information

NORMACONNECT® DCS COMBI CLAW								
Designation	DN	D (mm)	A (mm)	L (mm)	Torque (Nm)	Bolt (mm)	P max (bar)	W1 Product No.
COMBI Claw DN 50	50	76	18	72	20	M8	up to 10	0262 8590 050
COMBI Claw DN 80	80	99	18	72	20	M8	up to 10	0262 8590 080
COMBI Claw DN 100	100	130	21	82	25	M10	up to 10	0262 8591 100
COMBI Claw DN 125	125	156	21	96	25	M10	up to 8	0262 8592 125
COMBI Claw DN 150	150	180	21	96	25	M10	up to 8	0262 8592 150
COMBI Claw DN 200	200	235	27	110	65	M 12	up to 5	0262 8592 200
COMBI Claw DN 250	250	285	27	130	65	M 12	up to 3	0262 8592 250
COMBI Claw DN 300	300	335	27	130	65	M 12	up to 3	0262 8592 300

