

NORMACONNECT® DCS RAPID




NEW:
NOW ALSO FOR
PLASTIC DRAINAGE PIPES*

One connector for most drainage pipe materials*

- ✓ Single-bolt closure and block tightening save valuable time during installation
- ✓ Reliable connection of plain ended drainage pipes, e.g. even after shortening
- ✓ Suitable for unpressurised drainage systems with pipes and fittings made of cast iron acc. to EN 877 and drainage pipes made of plastic*, also in mixed installations

* For PP-H (HT), PVC-U (KG) or PE/HDPE plastic drainage pipes in unpressurised drainage systems with DCS RAPID DN 100

NORMACONNECT® DCS RAPID

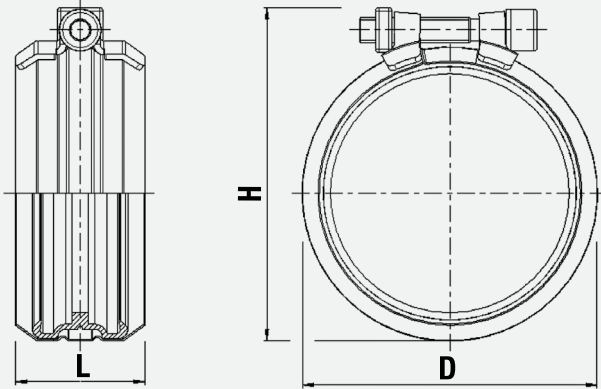

Applications

For non-pull-out resistant drainage connections: resisting pressure up to max. 0.5 bar or 0.3 bar, depending on the diameter and version (suitable for higher pressures with cast iron pipe systems in combination with our claws), e.g. in

- Buildings
- Buried in soil
- Kitchens
- Underground car parks
- Bridges
- Laboratories

Material

Group	W2	W5
Collar	AISI 430 Ti	AISI 316 Ti
Clamping unit	AISI 304 / AISI 430 Ti	AISI 316 Ti
Bolts/Nuts	Steel, surface protected	Stainless steel
Gasket	EPDM	

Designation	Max. Dimensions after Assembly						W2 Product No.	W5 Product No.
	DN	D (mm)	H (mm)	L (mm)	P max (bar)	Bolt (mm)	EPDM	EPDM
RAPID DN 50	50	70	80	46	0.5	M 8	0245 8218 050	0245 8126 050
RAPID DN 70	70	90	100	43	0.5	M 8	0245 8219 070	0245 8127 070
RAPID DN 75 S	75	87	97	40.5	0.5	M 8	0245 8265 075	
RAPID DN 80	75/80	95	105	40	0.5	M 8	0245 8220 080	0245 8129 075
RAPID DN 100*	100	125	135	39.0	0.5	M 8	0245 8221 100	0245 8130 100
RAPID DN 125	125	147	162	37.0	0.5	M 8	0245 8222 125	0245 8131 125
RAPID DN 150	150	172	187	35.5	0.5	M 8	0245 8223 150	0245 8132 150
RAPID DN 200	200	227	244	33.5	0.5	M 10	0245 8224 200	0245 8133 200
RAPID DN 250	250	293	306	96	0.3	M 10		0245 8208 250
RAPID DN 300	300	345	360	96	0.3	M 10		0245 8209 300

* Suitable for PP-H (HT), PVC-U (KG) or PE/HDPE plastic drainage pipes in unpressurised drainage systems

Technical benefits

- ✓ Corrugated housing expands during assembly and ensures visible torque control
- ✓ Fast and intuitive installation without a special tool
- ✓ In accordance with all fire protection requirements for cast installations acc. to EN 877

NORMACONNECT® DCS RAPID is part of a broad portfolio. Discover more!



NORMACONNECT® DCS RAPID MSM



NORMACONNECT® DCS Combi Claw



Do you have questions or require a personal consultation?

Feel free to contact our NORMA Team! Tel.: +49 2992 907-150

Visit our website for more information about our products: norma-connects.com

NORMA Group Holding GmbH | Edisonstraße 4 | 63477 Maintal | Germany | normagroup.com

This document supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this file (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this file do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented as of 15th February 2024 are not contractually binding.