




- 1 Hexagonal socket bolts
- 2 Hollow locking bars
- 3 Housing
- 4 Grip ring insert

The powerful add-on claw

Combined with either DCS RAPID or DCS RAPID MSM standards connectors, our NORMACONNECT® DCS Universal Claw is an axial restraint claw which resists high tensile loads. The grip-type coupling resists high tensile loads for non-pull-out resistant connections.

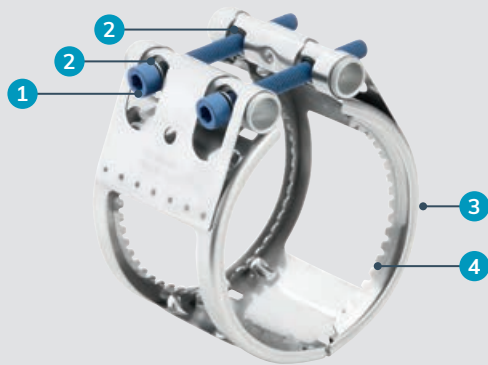

Materials

W1	W2	W3	W4	W5
	x			

W2

- Material, Housing: AISI 430 Ti
- Material, Closure unit: Steel, surface protected
- Material, Grip ring: AISI 301

Information

Recommended for use in combination with types RAPID/
RAPID MSM: up to max. 10 bar

Technical data & Ordering information

NORMACONNECT® DCS Universal CLAW								
Designation	DN	A (mm)	D (mm)	H (mm)	Bolt (mm)	P max (bar)	Torque (Nm)	W2 Product No.
						RAPID / RAPID MSM		
Universal Claw DN 50	50	77	85	105	M 8	10	Tight-Locking	0262 8401 050
Universal Claw DN 70	70	77	100	120	M 8	10	Tight-Locking	0262 8402 070
Universal Claw DN 75S	75	77	100	120	M 8	10	Tight-Locking	0262 8404 075
Universal Claw DN 80	75/80	77	105	125	M 8	10	Tight-Locking	0262 8403 080
Universal Claw DN 100	100	97	130	150	M 10	10	Tight-Locking	0262 8405 100
Universal Claw DN 125	125	97	165	195	M 10	10	Tight-Locking	0262 8406 125
Universal Claw DN 150	150	97	185	215	M 10	5	Tight-Locking	0262 8407 150
Universal Claw DN 200	200	113	240	270	M 12	5	Tight-Locking	0262 8415 200
Universal Claw DN 250	250	139	305	335	M 12	3	Tight-Locking	0262 8416 250
Universal Claw DN 300	300	139	400	490	M 12	3	Tight-Locking	0262 8417 300

