

NORMAFIX® U-Bolt Clamp




The stable fixing partner

- ✓ The “U” shape of the bolt keeps it firmly in place, adding stability to the connection
- ✓ Available in carbon steel and stainless steel
- ✓ Ready to install with improved locking capabilities
- ✓ Suitable for inside and outside installations

PIPE SUPPORT SYSTEMS

NORMAFIX® U-Bolt Clamp

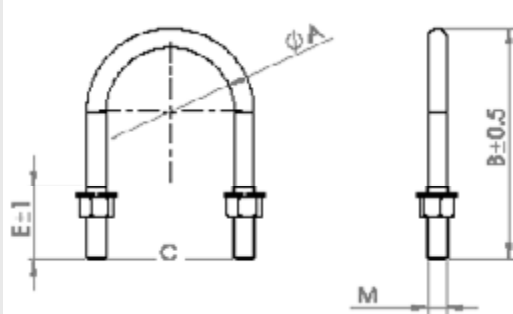

Applications

The NORMAFIX® U-Bolt Clamp has a vast range of applications. It is a universal solution for building and construction such as pipe or wire system.

Material

Group	W1, W4, W5
Size (inner diameter)	18 mm–354 mm
Thread Diameter	M6 / M8 / M10 (depending on size)
U-Bolt Wire	Zinc Plated Steel AISI 304 / AISI 316
Hexagonal Nut	Steel 8 Inox A2 / Inox A4
Spring Washer	Steel Inox A2 / Inox A4

Description	Measure					Article Number			Packaging Quantity (pcs)
	∅ A (mm)	B (mm)	C (mm)	E (mm)	M	W1	W4	W5	
U-Bolt 18	18	50	24	35	M6	0893 7211 018	0893 7214 018	0893 7215 018	100
U-Bolt 22	22	53	28	35	M6	0893 7211 022	0893 7214 022	0893 7215 022	100
U-Bolt 28	28	59	34	35	M6	0893 7211 028	0893 7214 028	0893 7215 028	100
U-Bolt 34	34	65	40	35	M6	0893 7211 034	0893 7214 034	0893 7215 034	100
U-Bolt 39	39	70	42	35	M6	0893 7211 039	0893 7214 039	0893 7215 039	100
U-Bolt 43	43	74	49	35	M6	0893 7211 043	0893 7214 043	0893 7215 043	100
U-Bolt 49	49	85	57	40	M8	0893 7211 049	0893 7214 049	0893 7215 049	100
U-Bolt 54	54	96	61	40	M8	0893 7211 054	0893 7214 054	0893 7215 054	100
U-Bolt 55	55	97	62	40	M8	0893 7211 055	0893 7214 055	0893 7215 055	100
U-Bolt 61	61	99	70	40	M8	0893 7211 061	0893 7214 061	0893 7215 061	100
U-Bolt 66	66	98	73	40	M8	0893 7211 066	0893 7214 066	0893 7215 066	100
U-Bolt 71	71	102	78	40	M8	0893 7211 071	0893 7214 071	0893 7215 071	100
U-Bolt 77	77	113	83	40	M8	0893 7211 077	0893 7214 077	0893 7215 077	100
U-Bolt 85	85	117	94	40	M8	0893 7211 085	0893 7214 085	0893 7215 085	50
U-Bolt 90	90	126	98	40	M8	0893 7211 090	0893 7214 090	0893 7215 090	50
U-Bolt 105	105	149	114	40	M10	0893 7211 105	0893 7214 105	0893 7215 105	50
U-Bolt 115	115	155	125	40	M10	0893 7211 115	0893 7214 115	0893 7215 115	50
U-Bolt 130	130	170	140	40	M10	0893 7211 130	0893 7214 130	0893 7215 130	50
U-Bolt 144	144	184	154	40	M10	0893 7211 144	0893 7214 144	0893 7215 144	50
U-Bolt 155	155	194	164	40	M10	0893 7211 155	0893 7214 155	0893 7215 155	25
U-Bolt 170	170	210	180	40	M10	0893 7211 170	0893 7214 170	0893 7215 170	25
U-Bolt 206	206	244	214	40	M10	0893 7211 206	0893 7214 206	0893 7215 206	25
U-Bolt 221	221	259	230	40	M10	0893 7211 221	0893 7214 221	0893 7215 221	25
U-Bolt 256	256	294	264	40	M10	0893 7211 256	0893 7214 256	0893 7215 256	25
U-Bolt 275	275	313	284	40	M10	0893 7211 275	0893 7214 275	0893 7215 275	25
U-Bolt 306	306	344	314	50	M10	0893 7211 306	0893 7214 306	0893 7215 306	25
U-Bolt 324	324	368	334	50	M10	0893 7211 324	0893 7214 324	0893 7215 324	25
U-Bolt 354	354	407	364	50	M10	0893 7211 354	0893 7214 354	0893 7215 354	25

NORMAFIX® U-Bolt Clamp is part of a broad portfolio.
Discover more!

More benefits

- ✓ Fits a range of pipes, hoses and conduit sizes
- ✓ Withstands harsh conditions and heavy loads, offering excellent vibration resistance
- ✓ Spring washers and nuts included and preassembled



Rails



Perforated Band



Do you have questions or require a personal consultation?

Contact your sales representative today to find out more.

Or visit our website for more information about our products: norma-connects.com



NORMA Group Holding GmbH | Edisonstraße 4 | 63477 Maintal | Germany | norma-connects.com

This document supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this folder (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this folder do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented as of September 18, 2025 are not contractually binding.