

NORMACONNECT® DCS RAPID




One connector for cast iron and plastic drainage pipes and fittings *

- ✓ Single-bolt closure and block tightening save valuable time during installation
- ✓ Pre-installed NBR gasket ensures easy setup, saving time and eliminating the need for gasket changes
- ✓ NBR gasket is specially designed to withstand aggressive media
- ✓ Reliable connection of plain ended drainage pipes, e.g. even after shortening
- ✓ Suitable for unpressurised drainage systems with pipes and fittings made of cast iron acc. to EN 877 and drainage pipes made of plastic *, also in mixed installations

* For PP-H (HT), PVC-U (KG) or PE/HDPE plastic drainage pipes in unpressurised drainage systems with DCS RAPID DN 100

NORMACONNECT® DCS RAPID

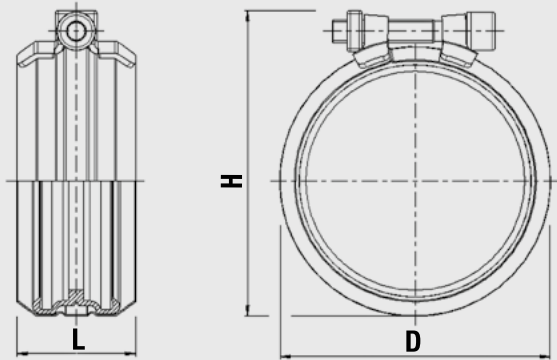

Applications

For non-pull-out resistant drainage connections: resisting pressure up to max. 0.5 bar or 0.3 bar, depending on the diameter and version (suitable for higher pressures with cast iron pipe systems in combination with our claws and NBR version especially suitable for aggressive media), e.g. in:

- Buildings
- Underground car parks
- Buried in soil
- Bridges
- Kitchens
- Laboratories

Material

Group	W2	W5
Collar	AISI 430 Ti	AISI 316 Ti
Clamping unit	AISI 304 / AISI 430 Ti	AISI 316 Ti
Bolts / Nuts	Steel, surface protected	Stainless steel
Gasket	EPDM NBR	

Description	Max. Dimensions After Assembly						W2 Part Number		W5 Part Number	
	DN	D (mm)	H (mm)	L (mm)	P max (bar)	Bolt (mm)	EPDM	NBR	EPDM	NBR
RAPID DN 50	50	70	80	46	0.5	M 8	0245 8218 050	0245 0003 050	0245 8126 050	0245 0004 050
RAPID DN 70	70	90	100	43	0.5	M 8	0245 8219 070	0245 0003 070	0245 8127 070	0245 0004 070
RAPID DN 75 S	75	87	97	40.5	0.5	M 8	0245 8265 075	0245 0003 075		0245 0004 075
RAPID DN 80	75/80	95	105	40	0.5	M 8	0245 8220 080	0245 0003 080	0245 8129 075	0245 0004 080
RAPID DN 100*	100	125	135	46	0.5	M 8	0245 8221 100	0245 0003 100	0245 8130 100	0245 0004 100
RAPID DN 125	125	147	162	61	0.5	M 8	0245 8222 125	0245 0003 125	0245 8131 125	0245 0004 125
RAPID DN 150	150	172	187	61	0.5	M 8	0245 8223 150	0245 0003 150	0245 8132 150	0245 0004 150
RAPID DN 200	200	227	244	70	0.5	M 10			0245 8133 200	0245 0004 200
RAPID DN 250	250	293	306	96	0.3	M 10			0245 8208 250	0245 0004 250
RAPID DN 300	300	345	360	96	0.3	M 10			0245 8209 300	0245 0004 300

* Suitable for PP-H (HT), PVC-U (KG) or PE/HDPE plastic drainage pipes in unpressurised drainage systems

NORMACONNECT® DCS RAPID is part of a broad portfolio.


Discover more!

Additional benefits

- ✓ Corrugated housing expands during assembly and ensures visible torque control
- ✓ Fast and intuitive installation without a special tool
- ✓ In accordance with all fire protection requirements for cast installations acc. to EN 877



NORMACONNECT® DCS RAPID MSM

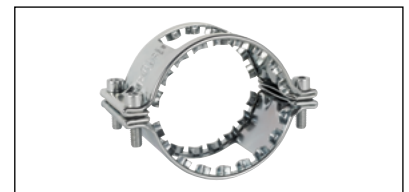

NORMACONNECT® DCS Combi Claw



Do you have questions or require a personal consultation?

Feel free to contact our NORMA Team!

Visit our website for more information about our products: norma-connects.com