



FIXING & RETAINING



NORMAFIX® U Bolt Clamp



Steel U Bolt Clamp with pre-assembled washers and nuts for simple and reliable pipe fixing

- ✓ Robust material for higher duty application
- ✓ High grade stainless steel for excellent corrosion resistance
- ✓ U-shaped steel bar perfectly fits around the outer diameter of pipes
- ✓ Range up to 350 mm for almost all pipe diameters




normagroup.com



FIXING & RETAINING



NORMAFIX® U Bolt Clamp

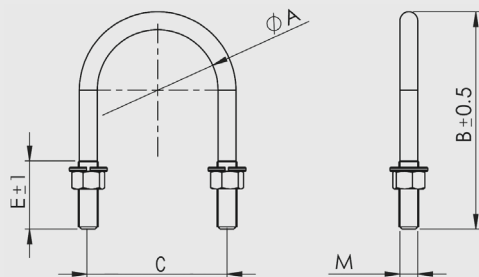

Applications

The NORMAFIX® U Bolt Clamp has a vast range of applications. For example, it is used in buildings, constructions and as an anchor for foundations, roofs, pipes and conduit holders.

Material

Group	W1, W4 and W5
U Bolt Wire	Zinc Plated Steel, AISI 304 / AISI 316
Hexagonal Nut	Steel 8, Inox A2 / Inox A4
Spring Washer	Steel, Inox A2 / Inox A4

Part number W1	Part number W4	Part number W5	Description	Measure						Packaging quantity (pcs)
				Ø (A) (mm)	B (mm)	C (mm)	E (mm)	M	Unfolded length (mm)	
0893 7211 018	0893 7214 018	0893 7215 018	U Bolt 18	18	50	24	35	M6	114	100
0893 7211 022	0893 7214 022	0893 7215 022	U Bolt 22	22	53	28	35	M6	122	100
0893 7211 028	0893 7214 028	0893 7215 028	U Bolt 28	28	59	34	35	M6	137	100
0893 7211 034	0893 7214 034	0893 7215 034	U Bolt 34	34	65	40	35	M6	153	100
0893 7211 039	0893 7214 039	0893 7215 039	U Bolt 39	39	70	42	35	M6	166	100
0893 7211 043	0893 7214 043	0893 7215 043	U Bolt 43	43	74	49	35	M6	176	100
0893 7211 049	0893 7214 049	0893 7215 049	U Bolt 49	49	85	57	40	M8	203	100
0893 7211 054	0893 7214 054	0893 7215 054	U Bolt 54	54	96	61	40	M8	227	100
0893 7211 055	0893 7214 055	0893 7215 055	U Bolt 55	55	97	62	40	M8	230	100
0893 7211 061	0893 7214 061	0893 7215 061	U Bolt 61	61	99	70	40	M8	237	100
0893 7211 066	0893 7214 066	0893 7215 066	U Bolt 66	66	98	73	40	M8	238	100
0893 7211 071	0893 7214 071	0893 7215 071	U Bolt 71	71	102	78	40	M8	249	100
0893 7211 077	0893 7214 077	0893 7215 077	U Bolt 77	77	113	83	40	M8	275	100
0893 7211 085	0893 7214 085	0893 7215 085	U Bolt 85	85	117	94	40	M8	287	50
0893 7211 090	0893 7214 090	0893 7215 090	U Bolt 90	90	126	98	40	M8	308	50
0893 7211 105	0893 7214 105	0893 7215 105	U Bolt 05	105	149	114	40	M10	364	50
0893 7211 115	0893 7214 115	0893 7215 115	U Bolt 15	115	155	125	40	M10	381	50
0893 7211 130	0893 7214 130	0893 7215 130	U Bolt 30	130	170	140	40	M10	420	50
0893 7211 144	0893 7214 144	0893 7215 144	U Bolt 44	144	184	154	40	M10	456	50
0893 7211 155	0893 7214 155	0893 7215 155	U Bolt 55	155	194	164	40	M10	482	25
0893 7211 170	0893 7214 170	0893 7215 170	U Bolt 70	170	210	180	40	M10	523	25
0893 7211 206	0893 7214 206	0893 7215 206	U Bolt 06	206	244	214	40	M10	611	25
0893 7211 221	0893 7214 221	0893 7215 221	U Bolt 21	221	259	230	40	M10	650	25
0893 7211 256	0893 7214 256	0893 7215 256	U Bolt 56	256	294	264	40	M10	740	25
0893 7211 275	0893 7214 275	0893 7215 275	U Bolt 75	275	313	284	40	M10	789	25
0893 7211 306	0893 7214 306	0893 7215 306	U Bolt 06	306	344	314	50	M10	868	25
0893 7211 324	0893 7214 324	0893 7215 324	U Bolt 24	324	368	334	50	M10	916	25
0893 7211 354	0893 7214 354	0893 7215 354	U Bolt 54	354	407	364	50	M10	1016	25



Do you have questions or wish to discuss your application?
Contact your sales representative today to find out more.
Or visit our website for more information about our products: normagroup.com



NORMA Group Holding GmbH | Edisonstraße 4 | 63477 Maintal | Germany | normagroup.com

This document supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this file (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this file do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented as of 1 April 2019 are not contractually binding.